


# Interface cable for ETAS measuring technique

## FETK interface cable

with Lemo female connector 10-pole and Lemo male connector 4-pin

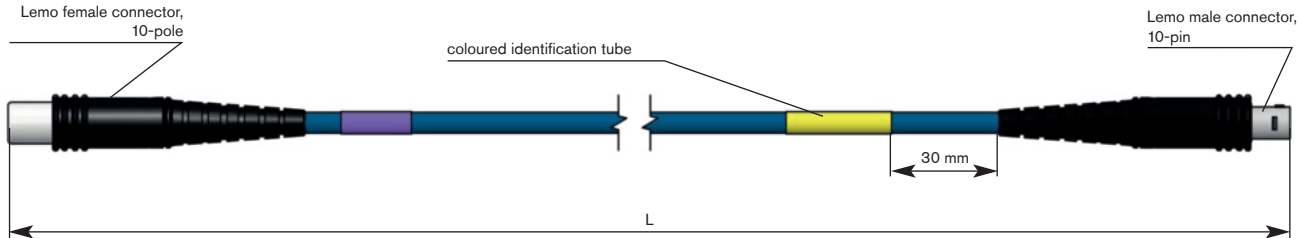

### Application range:

Connection of FETK control device with FETK interface module for example ES89x

#### SURVEY

### Measuring chain:

Control device:	FETK control device
Interface cable:	FETK interface cable
Interface module:	FETK interface module for example ES59x

### Connector:

Side 1:	Lemo female connector 10-pole
Side 2:	Lemo male connector 10-pin

### Configuration example:

item no.	length „L“ in cm
S1631-4013-00300	300

### SAB marking:

item no., order no., length

### Cable data:

Dimension:	4 x 2 x AWG26 + 2 x AWG24
Isolation:	TPFK
Screen:	global braiding 100%
Outer sheath:	PUR, colour blue, matt surface
Outer diameter:	approx. 6,6 mm
Min. bending radius:	10 x d
Peak operating voltage:	max. 90 V
Temperature range:	-40°C/+90°C (+125°C / 2500h)
Oil resistance:	very good - TMPU acc. to EN50363-10-2



### Further service issues:

- individual marking by shrinkable sleeve as for example with internal material no. or barcode