


# HARNESSED KOAX BNC CABLES



# HARNESSED KOAX BNC CABLES

## LOW NOISE COAXIAL CABLE

with BNC male and female connector

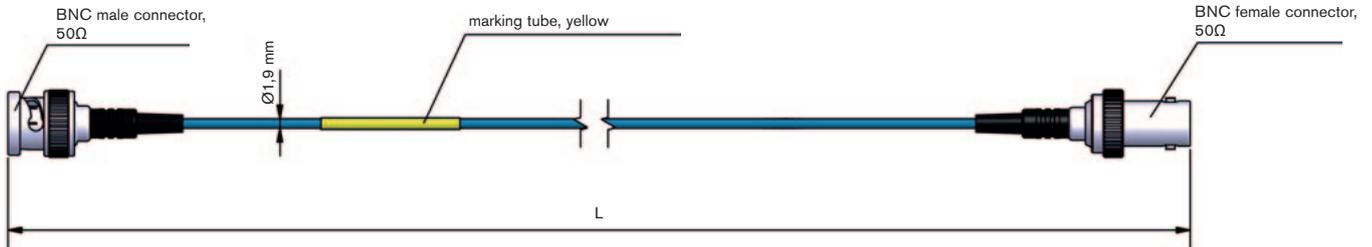

### Application:

low noise coaxial cable



### Cable characteristics:

- low noise
- temperature resistant up to +250 °C
- oil and chemical resistant - very good

### Cable data:

Construction:	1 x 0,25 mmØ
Insulation:	TPFK
Screen:	overall screen > 80%
Outer sheath:	TPFK, colour blue - RAL 5015
Outer diameter:	approx. 1,9 mm
Min. bending radius:	10 x d
Peak operating voltage:	375 V
Temperature range:	-55/+250 °C
Oil resistance:	very good

### Configuration example:

item no.	length „L“ in cm
S3620-4020-00100	100

### Connector:

side 1:	BNC male connector 50 Ω
side 2:	BNC female connector 50 Ω


### SAB marking:

item number, order number, length

# HARNESSED KOAX BNC CABLES

## LOW NOISE COAXIAL CABLE

with BNC male connector at both sides

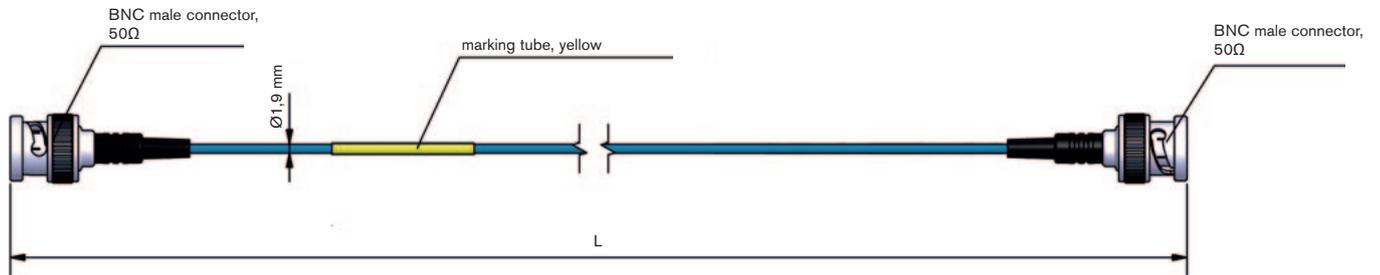

### Application:

low noise coaxial cable

### Cable characteristics:

- low noise
- temperature resistant up to +250 °C
- oil and chemical resistant - very good

### Cable data:

Construction:	1 x 0,25 mmØ
Insulation:	TPFK
Screen:	overall screen > 80%
Outer sheath:	TPFK, colour blue - RAL 5015
Outer diameter:	approx. 1,9 mm
Min. bending radius:	10 x d
Peak operating voltage:	375 V
Temperature range:	-55/+250 °C
Oil resistance:	very good

### Configuration example:

item no.	length „L“ in cm
S3620-4023-00100	100

### Connector:

side 1:	BNC male connector 50 Ω
side 2:	BNC male connector 50 Ω


### SAB marking:

item number, order number, length

# HARNESSED KOAX BNC CABLES


## COAXIAL CONNECTING CABLE RG 316 - 8-PLUG

with BNC male and female connectors 50 Ω

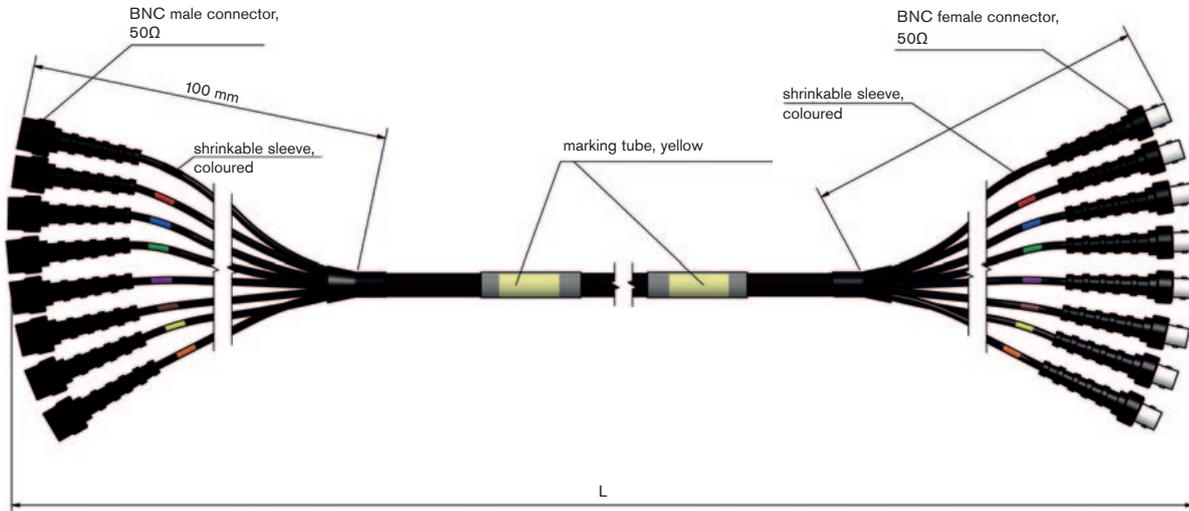

### Application:

multiple coaxial cable



### Cable characteristics:

- easy handling
- mechanically very rugged
- space-saving
- +125 °C / 2500h

### Cable data:

Construction:	8 x AWG26
Insulation:	TPFK
Screen:	single screen > 80%
Inner sheath:	TPE
Stranding:	together
Screen:	overall screen > 80%
Outer sheath:	PUR 420, colour black, mat surface
Outer diameter:	approx. 11,6 mm
Min. bending radius:	15 x d
Peak operating voltage:	900 V
Temperature range:	-40/+90 °C (+125 °C / 2500h)
Oil resistance:	very good - TPU acc. to EN50363-10-2

### Configuration example:

item no.	length „L“ in cm
S3600-4089-00200	200

### Connector:

side 1:	BNC male connector 50 Ω
side 2:	BNC female connector 50 Ω


### SAB marking:

item number, order number, length

# HARNESSED KOAX BNC CABLES

## COAXIAL CONNECTING CABLE RG 316 - 16-PLUG

with BNC male and female connectors 50 Ω

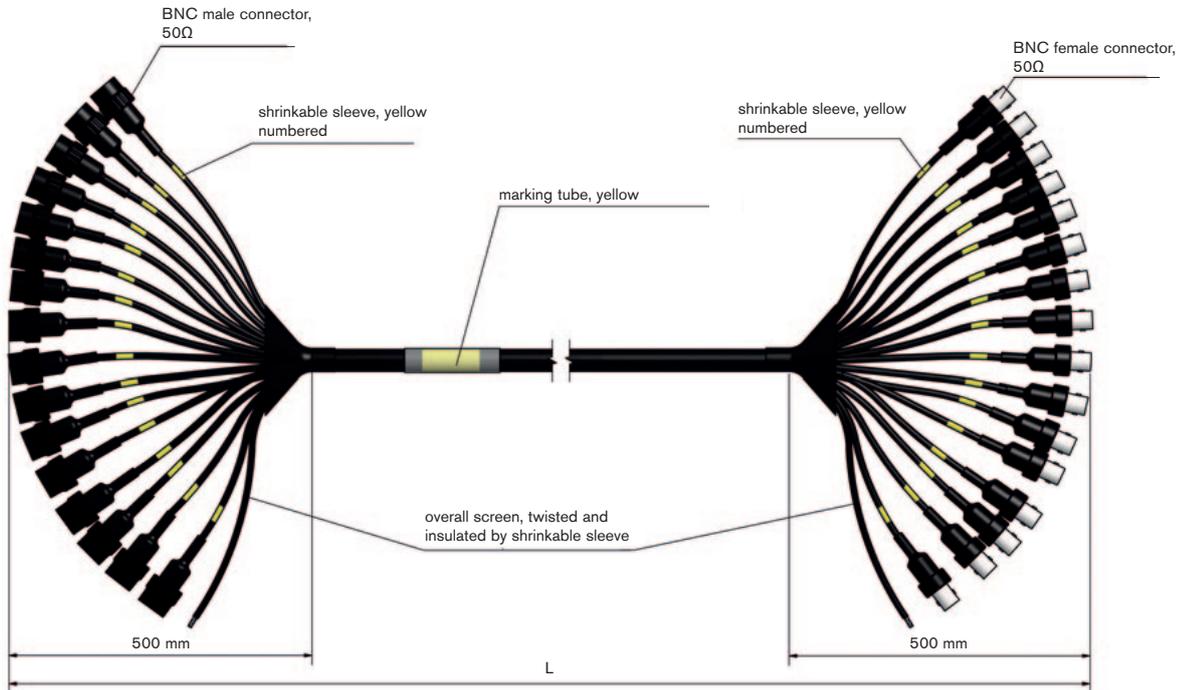

### Application:

multiple coaxial cable

### Cable characteristics:



- easy handling
- mechanically very rugged
- space-saving
- +125 °C / 2500h

### Cable data:

Construction:	16 x AWG26
Insulation:	TPFK
Screen:	single screen > 80%
Inner sheath:	TPE
Stranding:	together
Screen:	overall screen > 80%
Outer sheath:	PUR 420, colour black, mat surface
Outer diameter:	approx. 15,0 mm
Min. bending radius:	15 x d
Peak operating voltage:	900 V
Temperature range:	-40/+90 °C (+125 °C / 2500h)
Oil resistance:	very good - TMPU acc. to EN50363-10-2

### Configuration example:

item no.	length „L“ in cm
S3600-4073-01500	1500

### Connector:

side 1:	BNC male connector 50 Ω
side 2:	BNC female connector 50 Ω


### SAB marking:

item number, order number, length

# HARNESSED KOAX BNC CABLES

## COAXIAL CONNECTING CABLE

with BNC male connector and Microdot connector

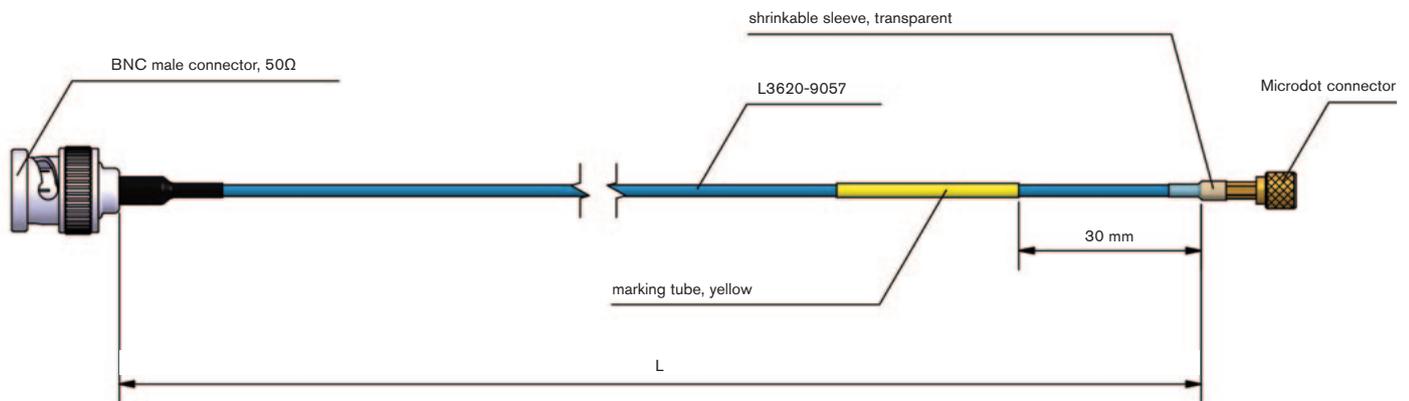

### Application:

coaxial cable as connection  
between sensor and measuring device

### Cable characteristics:



- low noise
- temperature resistant up to +250 °C
- oil and chemical resistant - very good

### Cable data:

Construction:	1 x 0,25 mm
Insulation:	PFA
Screen:	tinned copper braiding
Outer sheath:	PFA
Outer diameter:	approx. 1,9 mm
Min. bending radius:	10 x d
Peak operating voltage:	375 V
Temperature range:	-40/+70 °C

### Configuration example:

item no.	length „L“ in cm
S3620-4016-00300	300

### Connector:

side 1:	BNC male connector 50 Ω
side 2:	Microdot connector


### SAB marking:

item number, order number, length

# HARNESSED KOAX BNC CABLES

## COAXIAL CONNECTING CABLE

with BNC and SMB connector

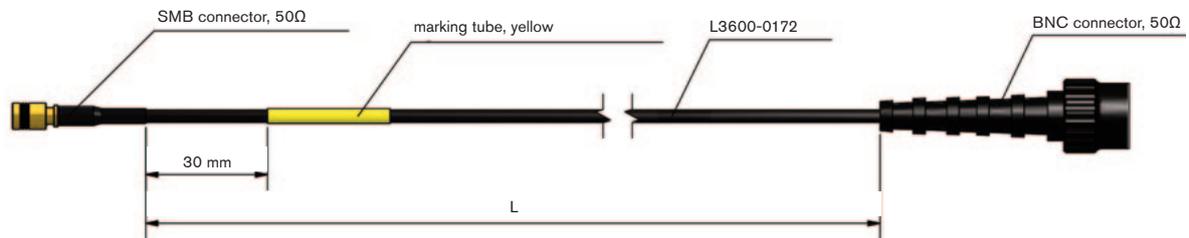

### Application:

coaxial cable as connection  
between sensor and measuring device

### Cable characteristics:



- excellent temperature resistance and flexibility at low temperatures
- excellent electrical insulating characteristics with low, nearly frequency-independent dielectric characteristics

### Cable data:

Construction:	AWG 26/7
Insulation:	FEP
Screen:	tinned copper braiding
Outer sheath:	TPE
Outer diameter:	approx. 1,9 mm
Min. bending radius:	7,5 x d
Peak operating voltage:	900 V
Temperature range:	
fixed laying:	-50/+90°C
flexible application:	-40/+90°C

### Configuration example:


item no.	length „L“ in cm
S3600-4092	200

### Connector:

side 1:	SMB connector 50 Ω
side 2:	BNC connector 50 Ω

### SAB marking:

item number, order number, length

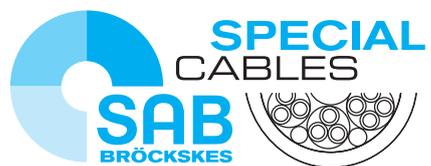

**SAB** Bröckskes GmbH & Co. KG

Grefrather Str. 204 - 212 b

41749 Viersen · GERMANY

Tel.: +49/2162/898-0

Fax: +49/2162/898-101

[www.sab-cable.com](http://www.sab-cable.com)

[info@sab-cable.com](mailto:info@sab-cable.com)