
PUSH PULL

SENSOR CABLE


with 6 pole Lemo male and female connector



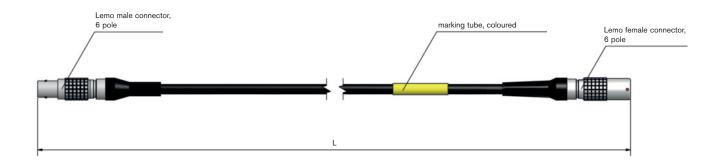

Application:

sensor extension cable



Outer diameter:	
Min. bending radius:	
Peak operating voltage:	
Temperature range:	
Oil resistance:	

	Cable data:
Construction:	7 x AWG26
Insulation:	TPFK
Screen:	overall screen >80%
Outer sheath:	PUR 420, colour black, mat surface
Outer diameter:	approx. 4,3 mm
Min. bending radius:	10 x d
Peak operating voltage:	max. 350 V
Temperature range:	-40/+90 °C (+125 °C / 2500h)
Oil resistance:	very good - TMPU acc. to EN50363-10-2

Configuration example:

item no.	length "L" in cm
S3833-4291-00100	100

	Connector:
side 1:	Lemo male connector, 6 pole
side 2:	Lemo female connector, 6 pole

SAB marking:

item number, order number, length

