


THERMOCOUPLES

ANGLE THERMOCOUPLE T231 / T233

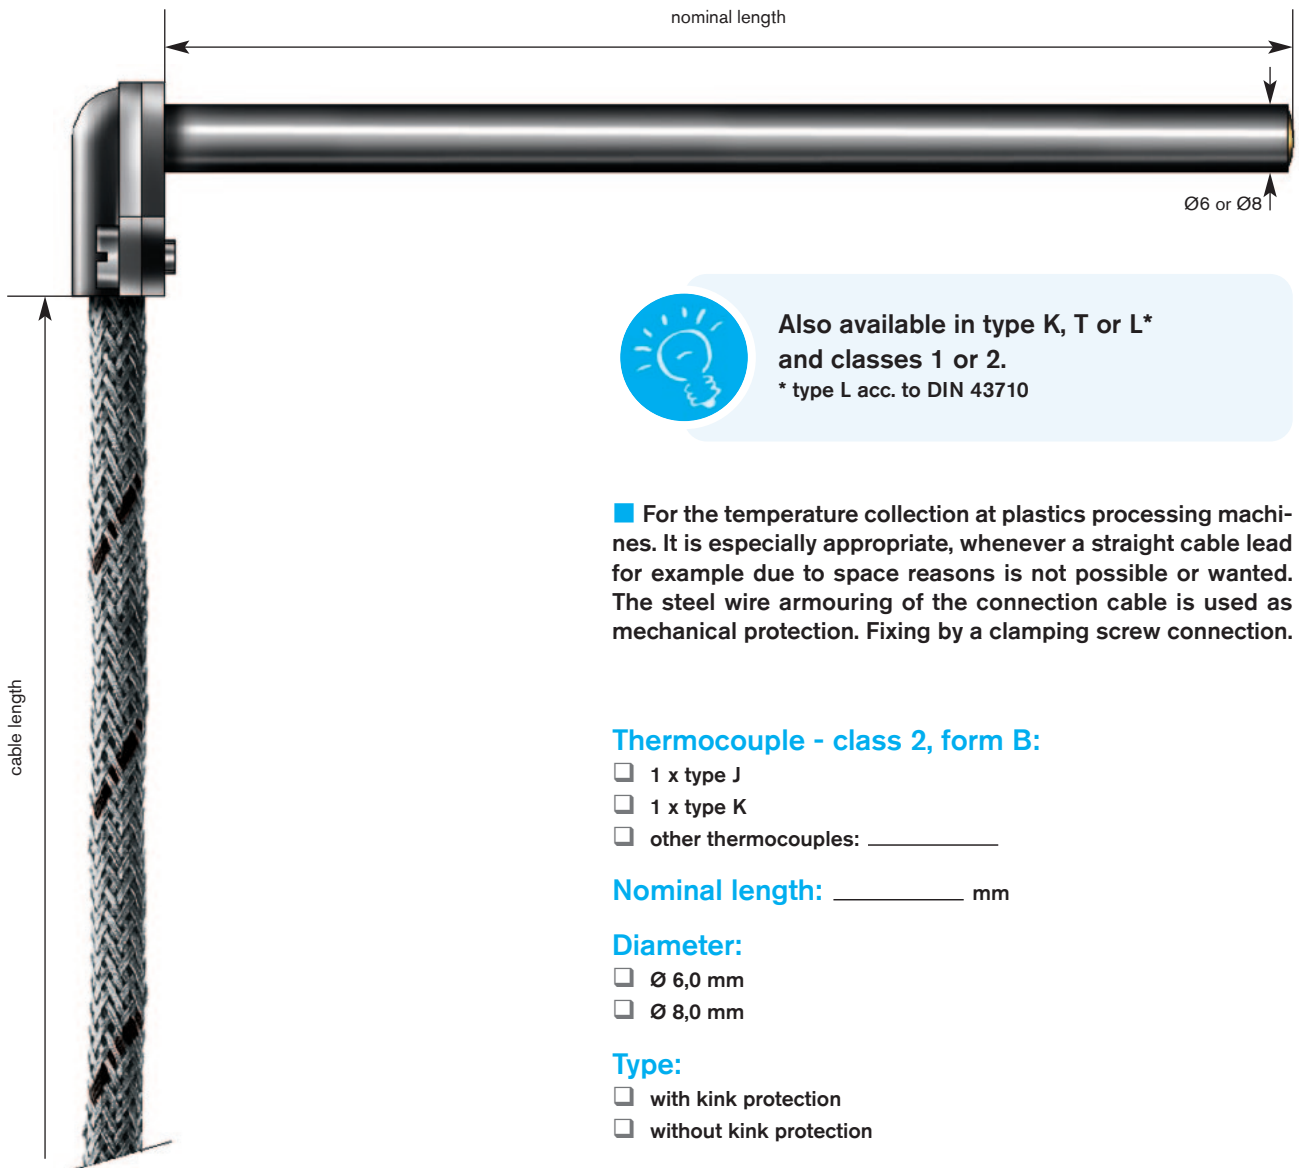

Also available in type K, T or L*
and classes 1 or 2.

* type L acc. to DIN 43710

■ For the temperature collection at plastics processing machines. It is especially appropriate, whenever a straight cable lead for example due to space reasons is not possible or wanted. The steel wire armoring of the connection cable is used as mechanical protection. Fixing by a clamping screw connection.

Thermocouple - class 2, form B:

- 1 x type J
- 1 x type K
- other thermocouples: _____

Nominal length: _____ mm

Diameter:

- Ø 6,0 mm
- Ø 8,0 mm

Type:

- with kink protection
- without kink protection

Connection cable:

(see also survey of connecting cables for thermocouples)

- extension cable strand/fiber glass/fiber glass/
stainless steel wire armoring +400°C
- extension cable strand/PFA/fiber glass/
stainless steel wire armoring +250°C
- _____

Cable length: _____ m

Connection ends:

- miniature thermoplug
- standard plug
- clips
- bare ends
- miniature socket
- Lemo plug type _____
- Lemo socket type _____
- other cable ends _____

cable length



The above mentioned technical data are standard data.

Individual parameters, e. g. connection cable, double thermocouple, cable end or higher temperature resistance can be added or modified on request.