


THERMOCOUPLES

ANGLE THERMOCOUPLE T277



■ For the temperature collection at tools. Simple fixing by a screw with initial tension (guarantees the contact between probe and plain to be measured). The stainless steel wire armouring of the connection cable is used as mechanical protection.

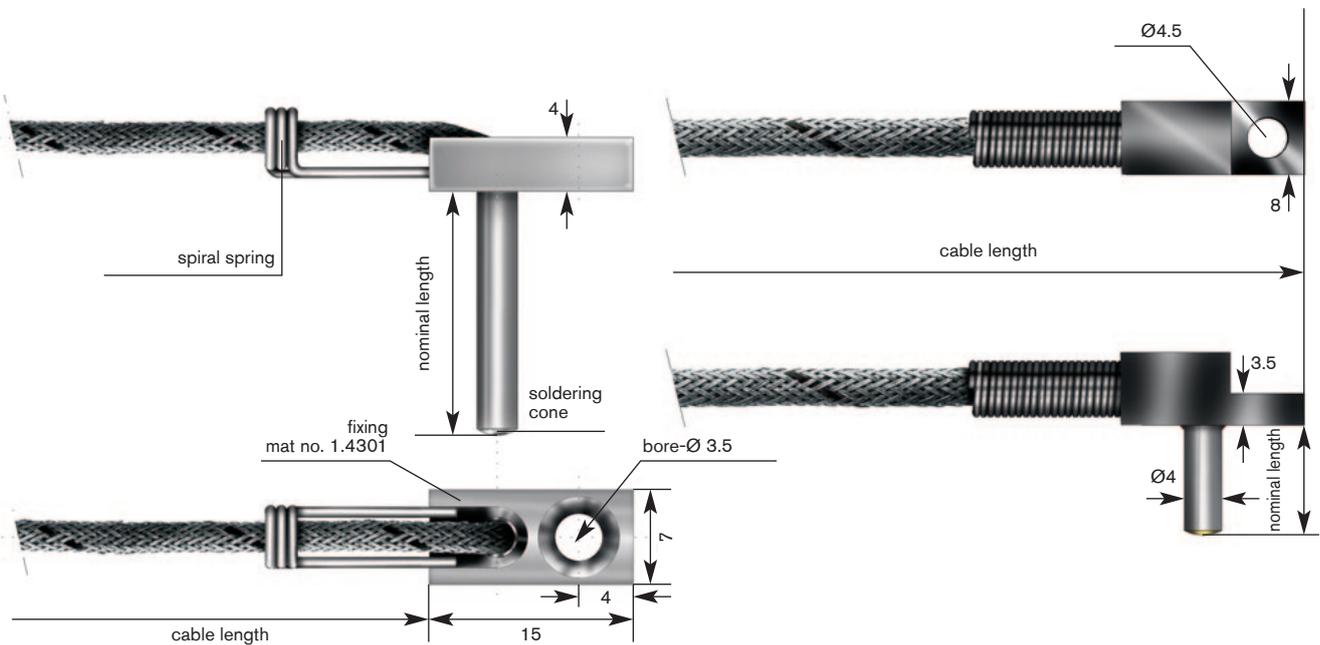

Also available in type K, T or L* and classes 1 or 2.

* type L acc. to DIN 43710

Thermocouple - class 2:

- 1 x type J
- 1 x type K
- other thermocouples: _____

Measuring point:

- form A, insulated
- form B, grounded

Material:

- 1.4571

Diameter:

- Ø 3,0 mm
- Ø 4,0 mm
- Ø 5,0 mm

Fixing and spiral spring:

- with
- without

Nominal length: _____ mm

AnConnection cable:

(see also survey of connecting cables for thermocouples)

- extension cable strand/fiber glass/fiber glass/
stainless steel wire armouring +400°C
- extension cable strand/PFA/fiber glass/
stainless steel wire armouring +250°C
- _____

Cable length: _____ m

Connection ends:

- miniature thermoplug
- standard plug
- clips
- bare ends
- miniature socket
- Lemo plug type _____
- Lemo socket type _____
- other cable ends _____



The above mentioned technical data are standard data.

Individual parameters, e. g. connection cable, double thermocouple, nominal length, bayonet or cable end can be added or modified on request.