


# HARNESSED KOAX BNC CABLES

## COAXIAL CONNECTING CABLE RG 316 - 8-PLUG

with BNC male and female connectors 50  $\Omega$

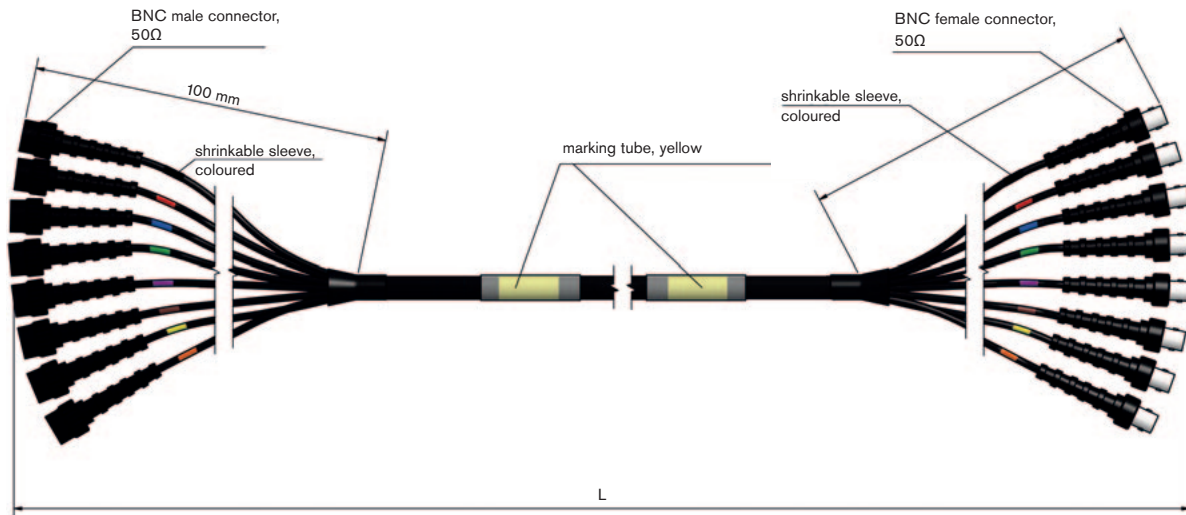

### Application:

multiple coaxial cable



### Cable characteristics:

- easy handling
- mechanically very rugged
- space-saving
- +125  $^{\circ}\text{C}$  / 2500h

### Cable data:

Construction:	8 x AWG26
Insulation:	TPFK
Screen:	single screen > 80%
Inner sheath:	TPE
Stranding:	together
Screen:	overall screen > 80%
Outer sheath:	PUR 420, colour black, mat surface
Outer diameter:	approx. 11,6 mm
Min. bending radius:	15 x d
Peak operating voltage:	900 V
Temperature range:	-40/+90 $^{\circ}\text{C}$ (+125 $^{\circ}\text{C}$ / 2500h)
Oil resistance:	very good - TPU acc. to EN50363-10-2

### Configuration example:

item no.	length „L“ in cm
S3600-4089-00200	200

### Connector:

side 1:	BNC male connector 50 $\Omega$
side 2:	BNC female connector 50 $\Omega$

### SAB marking:

item number, order number, length