


HARNESSED KOAX BNC CABLES

COAXIAL CONNECTING CABLE

with BNC male connector and Microdot connector

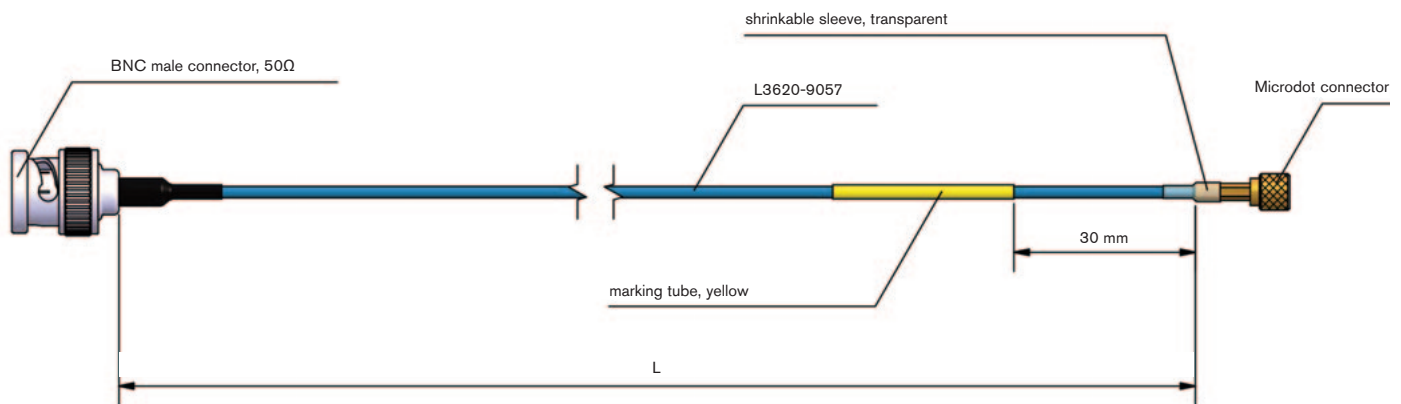

Application:

coaxial cable as connection
between sensor and measuring device

Cable characteristics:



- low noise
- temperature resistant up to +250 °C
- oil and chemical resistant - very good

Cable data:

| | |
|-------------------------|------------------------|
| Construction: | 1 x 0,25 mm |
| Insulation: | PFA |
| Screen: | tinned copper braiding |
| Outer sheath: | PFA |
| Outer diameter: | approx. 1,9 mm |
| Min. bending radius: | 10 x d |
| Peak operating voltage: | 375 V |
| Temperature range: | -40/+70 °C |

Configuration example:

| item no. | length „L“ in cm |
|------------------|---------------------|
| S3620-4016-00300 | 300 |

Connector:

| | |
|---------|-------------------------|
| side 1: | BNC male connector 50 Ω |
| side 2: | Microdot connector |

SAB marking:

item number, order number, length