


# HARNESSED KOAX BNC CABLES

## LOW NOISE COAXIAL CABLE

with BNC male connector at both sides

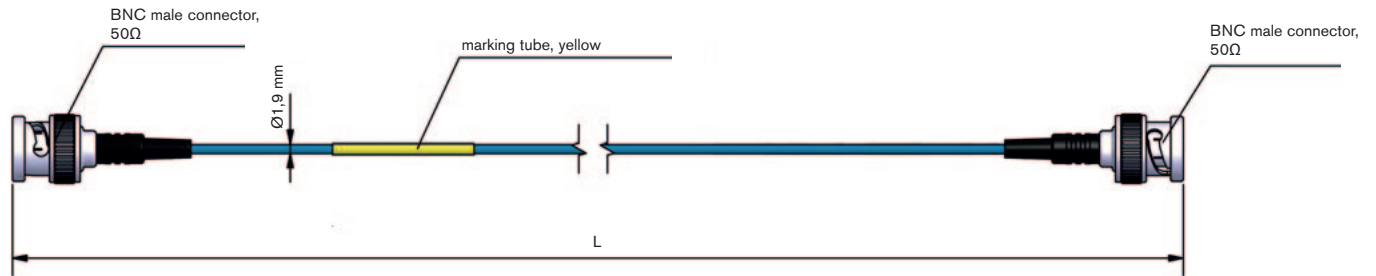

### Application:

low noise coaxial cable



### Cable characteristics:

- low noise
- temperature resistant up to +250 °C
- oil and chemical resistant - very good

### Cable data:

Construction:	1 x 0,25 mmØ
Insulation:	TPFK
Screen:	overall screen > 80%
Outer sheath:	TPFK, colour blue - RAL 5015
Outer diameter:	approx. 1,9 mm
Min. bending radius:	10 x d
Peak operating voltage:	375 V
Temperature range:	-55/+250 °C
Oil resistance:	very good

### Configuration example:

item no.	length „L“ in cm
S3620-4023-00100	100

### Connector:

side 1:	BNC male connector 50 Ω
side 2:	BNC male connector 50 Ω

### SAB marking:

item number, order number, length