


THERMOCOUPLES

SURFACE THERMOCOUPLE T999



■ For the temperature collection at conduits, generally spoken at all cylindric dimensions as well as at plastics processing machines. Fixing by pipe clamp. The stainless steel wire armouring of the connection cable is used as mechanical protection.

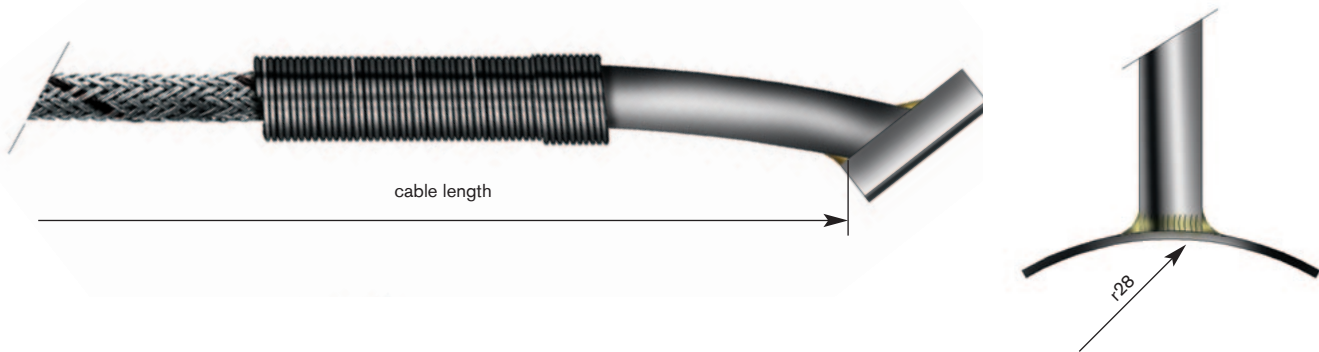

Also available in type K, T or L*
and classes 1 or 2.
* type L acc. to DIN 43710

Thermocouple - class 2:

- 1 x type J
- 1 x type K
- other thermocouples: _____

Measuring point:

- form B, grounded measuring point

Material:

- 1.4571

Nominal length:

- 38 mm
- _____ mm

Diameter:

- Ø 6,0 mm

Fix accessories:

- sheet 15 x 30 mm, radius: 28 mm
- _____

Temperature range:

- +400°C

Nominal length: _____ mm

AnConnection cable:

(see also survey of connecting cables for thermocouples)

- extension cable strand/fiber glass/fiber glass/
stainless steel wire armouring +400°C
- extension cable strand/PFA/fiber glass/
stainless steel wire armouring +250°C
- _____

Cable length: _____ m

Connection ends:

- miniature thermoplug
- standard plug
- clips
- bare ends
- miniature socket
- Lemo plug type _____
- Lemo socket type _____
- other cable ends _____



The above mentioned
technical data
are standard data.

Individual parameters,
e. g. connection cable,
double thermocouple,
radius or cable end
can be added or modified
on request.