


# RESISTANCE THERMOMETERS

## RTD 604

Mineral insulated resistance thermometer with connection head

<b>RTD:</b>	Pt 100 acc. to DIN EN 60751
<b>sheath material:</b>	mat. no. 1.4541
<b>measuring range:</b>	-50 up to +400°C and -50 up to +600°C

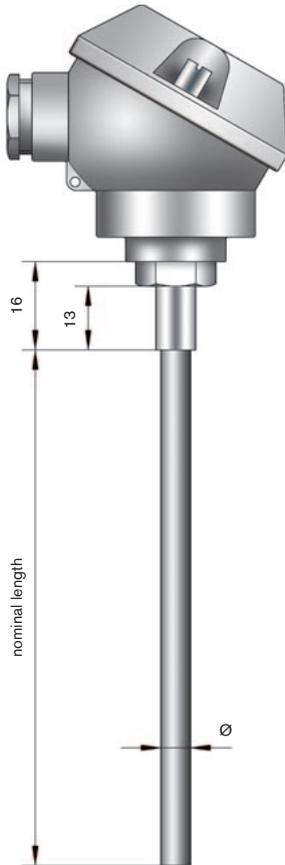

### RTD:

- 1 x Pt 100 class B
- 1 x Pt 100 class A
- 2 x Pt 100 class B
- 2 x Pt 100 class A

### CIRCUIT OF INNER WIRES:

- 2-wire circuit
- 3-wire circuit
- 4-wire circuit

### SHEATH - Ø:

- 3,0 mm
- 4,5 mm
- 6,0 mm
- other sheath-Ø \_\_\_\_\_

### CONNECTION HEAD:

- form MA
- form S
- form L
- other connection heads \_\_\_\_\_

### ACCESSORIES (FIX):

- without
- with accessories \_\_\_\_\_

### MEASURING RANGE:

- 50 up to +400°C
- 50 up to +600°C
- other measuring range \_\_\_\_\_

**NOMINAL LENGTH:** \_\_\_\_\_ mm