


# Extension cable for ETAS measuring technique

## ETK extension

with Lemo male connector 4-pin and Lemo female connector 4-pole

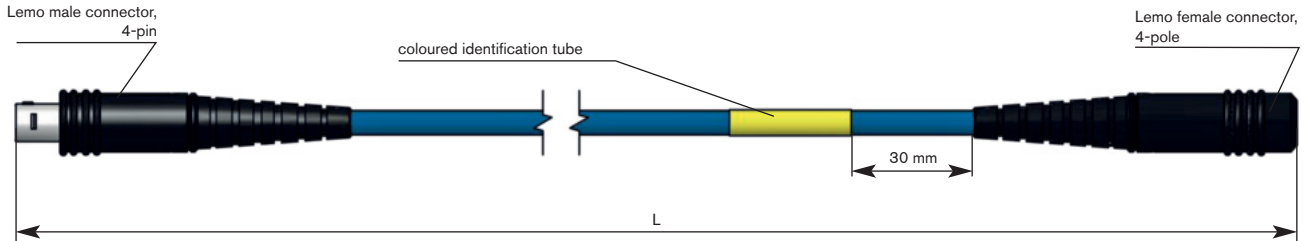

### Application range:

Extension of ETK interface cable and connection to ETK interface module for example ES59x

#### SURVEY

### Measuring chain:

Interface cable:	ETK interface cable (catalogue page 8)
Extension cable:	ETK extension cable
Interface module:	ETK interface module for example ES59x

### Connector:

Side 1:	Lemo male connector 4-pin
Side 2:	Lemo female connector 4-pole

### Configuration example:

item no.	length „L“ in cm
S3833-4568-00100	100

### SAB marking:

item no., order no., length

### Cable data:

Dimension:	2 x 2 x 0,22 mm <sup>2</sup>
Isolation:	TPFK
Screen:	global braiding 100%
Outer sheath:	Besilen®, colour blue
Outer diameter:	approx. 5,8 mm
Min. bending radius:	10 x d
Peak operating voltage:	max. 350 V
Temperature range	
fixed laying:	-40°C/+180°C
flexible application:	-25°C/+180°C



### Further service issues:

- individual marking by shrinkable sleeve as for example with internal material no. or barcode