
# **PUSH PULL**

## SENSOR CABLE


with 6 pole Lemo male connector and stripped end



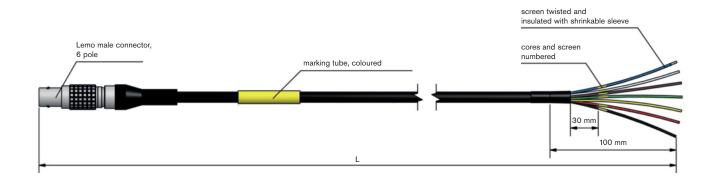

## **Application:**

sensor cable, open ends



	Cable data:
Construction:	7 x AWG26
Insulation:	TPFK
Screen:	overall screen >80%
Outer sheath:	PUR 420, colour black, mat surface
Outer diameter:	approx. 4,3 mm
Min. bending radius:	10 x d
Peak operating voltage:	max. 350 V
Temperature range:	-40/+90 °C (+125 °C / 2500h)
Oil resistance:	very good - TMPU acc. to EN50363-10-2

### Configuration example:

item no.	length "L" in cm
S3833-4080-00050	50

	Connector:	
side 1:	Lemo male connector, 6 pole	
side 2:	stripped end	

### SAB marking:

item number, order number, length

