

HARNESSED CABLES

REQUEST TO SAB BRÖCKSKES

FAX: 02162/898-101 · E-Mail: info@sab-broeckskes.de

Company/Name: _____

INFORMATION ABOUT THE CABLE

SAB cable item no. (if available): _____

(otherwise): _____

Dimension: _____

Construction: _____

Application (temperature, voltage where appropriate motion profile): _____

INFORMATION ABOUT HARNESING

SIDE 1

END OPEN

- smooth cut off
- length sheath removed [mm]
- stripped length [mm]
- cable end sleeves (if yes, which requirement)

PLUG

- identify connector (manufacturer, item number, reference sources)
- plug (male) oder socket (female)
- number of poles
- type of contact (solder/crimp/insulation displacement connector)
- encoding
- housing type (plastic/metal)
- cable exit (angled/straight)
- mounted/molded

CONFIGURATION

- pin assignment
- screen (if any) applied (on the housing / on pin) or cut off

SIDE 2

END OPEN

- smooth cut off
- length sheath removed [mm]
- stripped length [mm]
- cable end sleeves (if yes, which requirement)

PLUG


- identify connector (manufacturer, item number, reference sources)
- plug (male) oder socket (female)
- number of poles
- type of contact (solder/crimp/insulation displacement connector)
- encoding
- housing type (plastic/metal)
- cable exit (angled/straight)
- mounted/molded

CONFIGURATION

- pin assignment
- screen (if any) applied (on the housing / on pin) or cut off

OTHER quantity / O series required

HELIX DATA

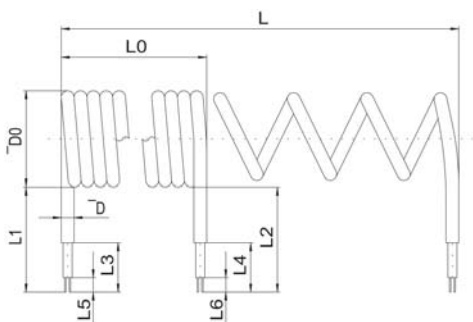

L = _____ mm L2 = _____ mm
 L0 = _____ mm L3 = _____ mm
 øD = _____ mm L4 = _____ mm
 øD0 = _____ mm L5 = _____ mm
 L1 = _____ mm L6 = _____ mm

Screen: yes no

Cable ends: radial axial other