


# USB 3.0 CABLES



## USB 3.0 CABLE WITH HAND-ASSEMBLED CONNECTORS

USB 3.0 cable with hand-assembled type A connector and type C connector

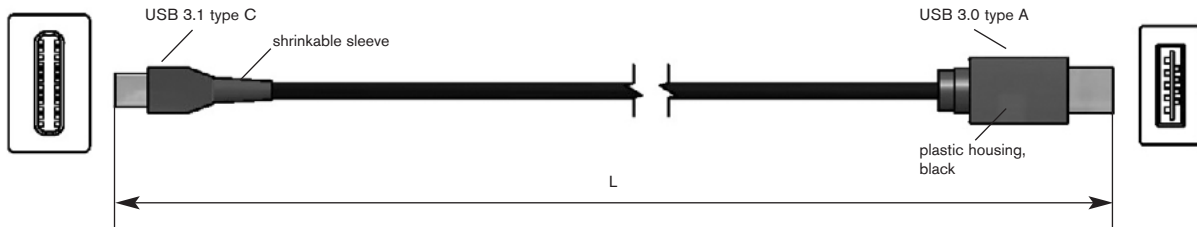

### Application:

Connection cable USB A  
with USB C connector



### Cable characteristics:

- mechanically very rugged
- PUR cable suitable for cable tracks

### Cable data:

Construction:	3x(2x30AWG)ST+2x24AWG
Insulation:	SABIX®
Outer sheath:	PUR
Outer diameter:	approx. 6,1 mm
Min. bending radius:	10 x d
Peak operating voltage:	max. 350 V

### Configuration example:

item no.	length „L“ in cm
S0604-4009-00100	100
S0604-4009-00200	200
S0604-4009-00300	300
S0604-4009-00500	500

### Connector:

side 1:	USB 3.0 type A connector (hand-assembled)
side 2:	USB 3.1 type C connector (hand-assembled)

### SAB marking:

item number, order number, length