
## USB 3.0 CABLE WITH MOULDED CONNECTOR


USB 3.0 cable with moulded type A and Micro-B male connector



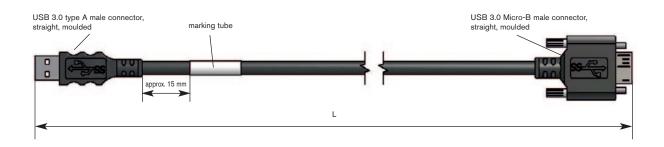

## **Application:**

Connection cable PC – 3D camera



	Cable data:
Construction:	3x(2x30AWG)ST+2x24AWG
Insulation:	SABIX®
Outer sheath:	PUR
Outer diameter:	approx. 6,1 mm
Min. bending radius:	10 x d
Peak operating voltage:	max. 350 V

## Configuration example:

item no.	length "L" in cm
S0604-4004-00100	100
S0604-4004-00200	200
S0604-4004-00300	300
S0604-4004-00500	500

	Connector:
side 1:	USB 3.0 type A male connector
side 2:	USB 3.0 type Micro-B male connector

## SAB marking:

item number, order number, length

