
USB 3.0 CABLES

USB 3.0 CABLE WITH MOULDED CONNECTOR






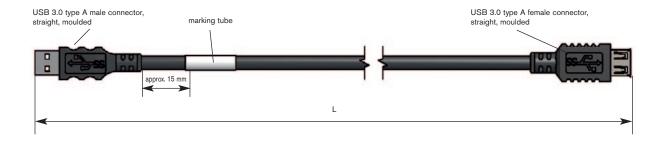

Application:

Extension cable



	Cable data:
Construction:	3x(2x30AWG)ST+2x24AWG
Insulation:	SABIX®
Outer sheath:	PUR
Outer diameter:	approx. 6,1 mm
Min. bending radius:	10 x d
Peak operating voltage:	max. 350 V

Configuration example:

item no.	length "L" in cm
S0604-4005-00050	50
S0604-4005-00100	100
S0604-4005-00200	200
S0604-4005-00300	300
S0604-4005-00500	500

	Connector:	
side 1:	USB 3.0 type A male connector	
side 2:	USB 3.0 type A female connector	

SAB marking:

item number, order number, length

