


Item no.: 0694-9001

4 x 2 x AWG 26 + 4 x 1,0 mm<sup>2</sup>

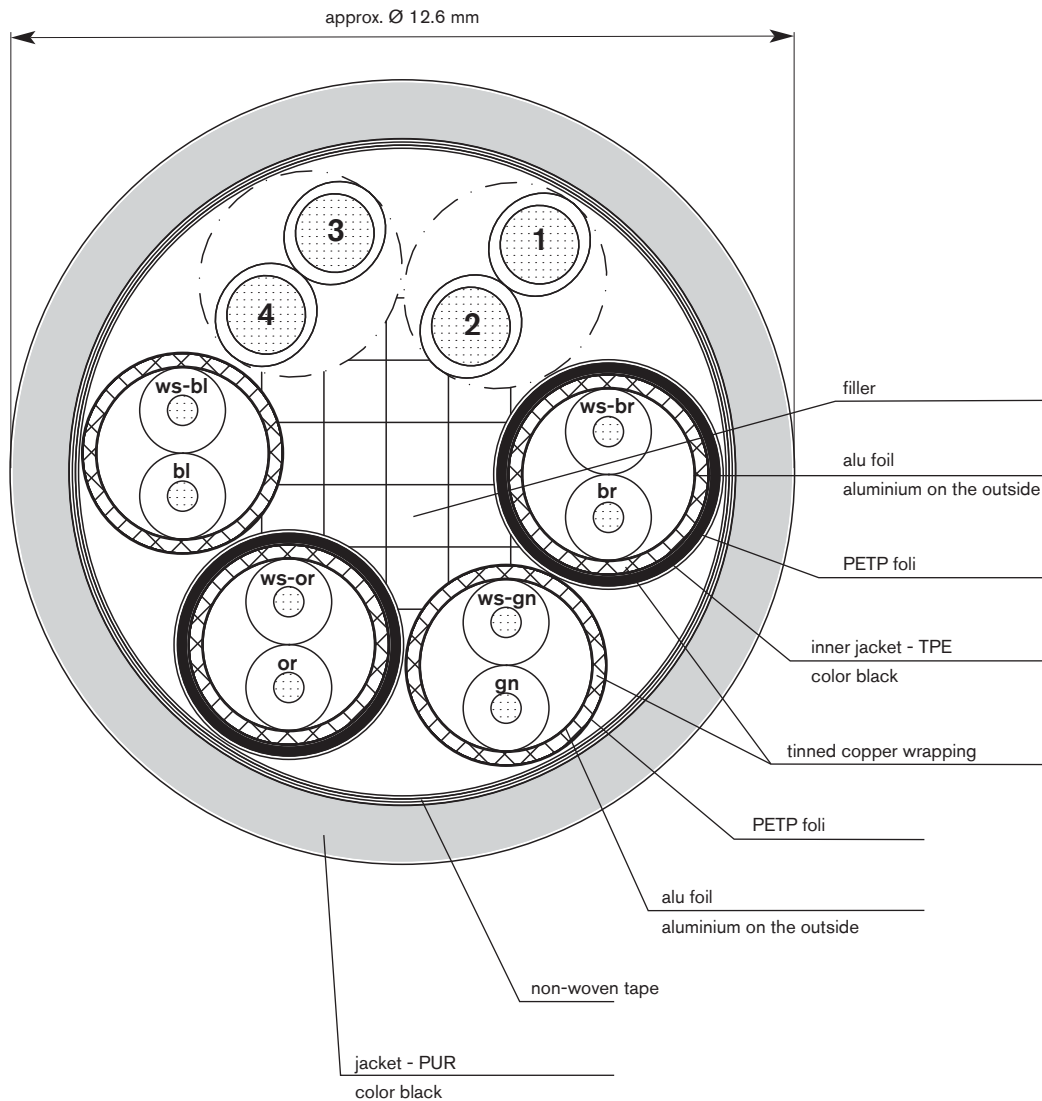

conductors 4 x 2 x AWG 26 + 4 x 1,0 mm<sup>2</sup>: tinned copper strands

insulation 4 x 1,0 mm<sup>2</sup>: TPE in black with numbers 1 - 4

insulation conductors 4 x 2 x AWG 26: FEP, wt-bl/bl, wt-or/or, wt-gn/gn, wt-bn/bn

## Technical Data

Peak operating voltage:	AWG 26: max. 350 V
Nominal voltage:	1,0 mm <sup>2</sup> : 300/500 V
Testing voltage:	cond./cond. 1500 V (AWG 26) 2000 V (1,0 mm <sup>2</sup> ) cond./screen 1200 V (AWG 26)
Temperature range:	
flexible application:	-40°C up to +90°C
fixed laying:	-50°C up to +90°C
Min. bending radius:	
flexing:	10 x outer diameter
static:	5 x outer diameter
Absence of harmful substances:	acc. to RoHS directive of the European Union

Further technical information on request