



Construction:

Conductor:	bare copper strands acc. to IEC 60228
Insulation:	TPE
Colour code:	white cores with consecutive numbers acc. to EN 50334 + VDE 0293-334 and a green-yellow earth wire
Sheath material:	PUR, TMPU acc. to EN 50363-10-2 + VDE 0207-363-10-2
Sheath colour:	sky blue (RAL 5015)

item no.	dimension mm ²	outer-ø ≈ mm
0399-0157	3 x 1,0 + 4 x 0,5 + 3 x 3 x 0,5 + (2 x 0,5) D	12,1

Other dimensions and colours are possible on request.

Technical Data:

Peak operating voltage	Testing voltage	Temperature range	Min. bending radius	Absence of harmful substances
max. 500 V	core/core 1500 V core/screen 1200 V	flexible application: -40/+90 °C	recommended: 10 x d	acc. to RoHS directive of the European Union



Further welding gun cables on request!

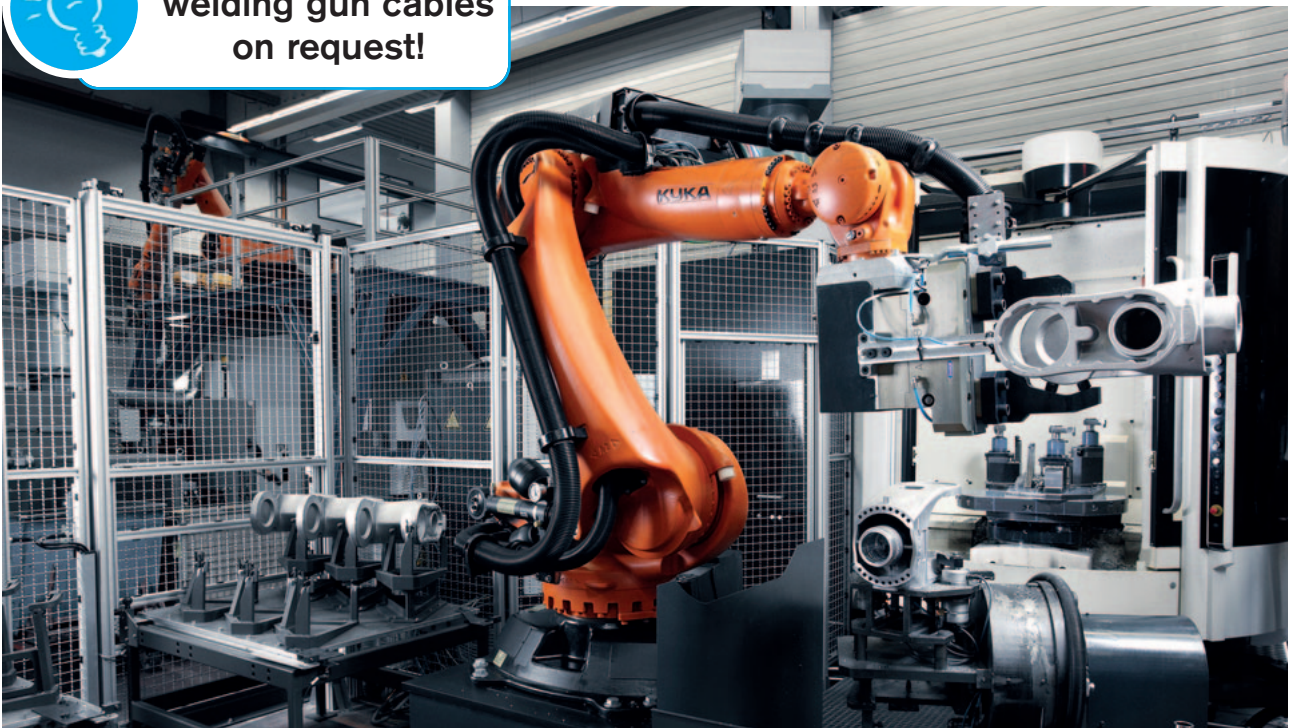


Foto: KUKA AG