

Construction:

Optical waveguide:	POF - polymer optical fibre
Colour code:	black + orange
Sheath material:	PUR, TPU acc. to EN 50363-10-2 + VDE 0207-363-10-2
Sheath colour:	0664-9001 blazing red (RAL 3000) 0671-9013 green (RAL 6018)

item no.	dimension	colour	outer- ϕ \approx mm
0664-9001	2 x POF	red	8,0
0671-9013	2 x POF	green	8,0

Other dimensions and colours are possible on request.

Technical Data:

Temperature range	Min. bending radius	Absence of harmful substances
flexible application: -20/+70 °C	POF mind. 30 mm recommended for the complete cable: 10 x d	acc. to RoHS directive of the European Union

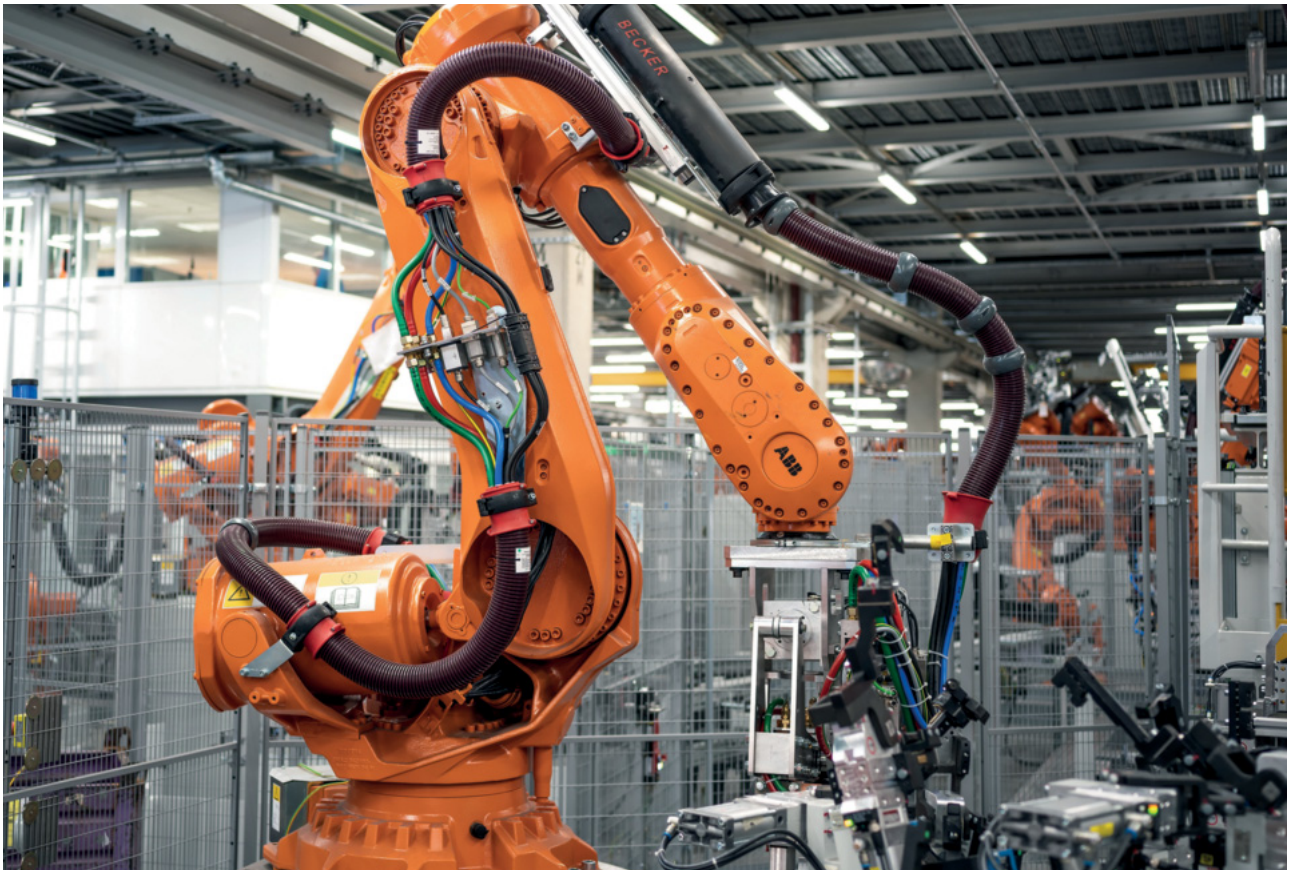


Foto: Becker GmbH, Dülmen