


Construction:

Conductor:	bare copper strands acc. to IEC 60228
Insulation:	TPE
Colour code:	acc. to specification
Sheath material:	PUR, TMPU acc. to EN 50363-10-2 + VDE 0207-363-10-2
Sheath colour:	black (RAL 9005)

item no.	dimension mm ²	outer-ø ≈ mm
0764-9120	4 x 0,75 + 2 x (2 x 0,34)	9,7
0796-9253	4 x 1,5 + 2 x (2 x 0,75) D	13,9
0779-9043	4 x 2,5 + 2 x 1,0	12,1
0726-0070	4 x 2,5 + (2 x 1,0) C	12,1
0841-9202	4 x 2,5 + (2 x 1,5) C	12,9

Technical Data:

Nominal voltage	Temperature range	Halogen-free	Absence of harmful substances
U ₀ /U 450/750 V	flexible application: -40/+90 °C	acc. to IEC 60754-1 + VDE 0482-754-1	acc. to RoHS directive of the European Union

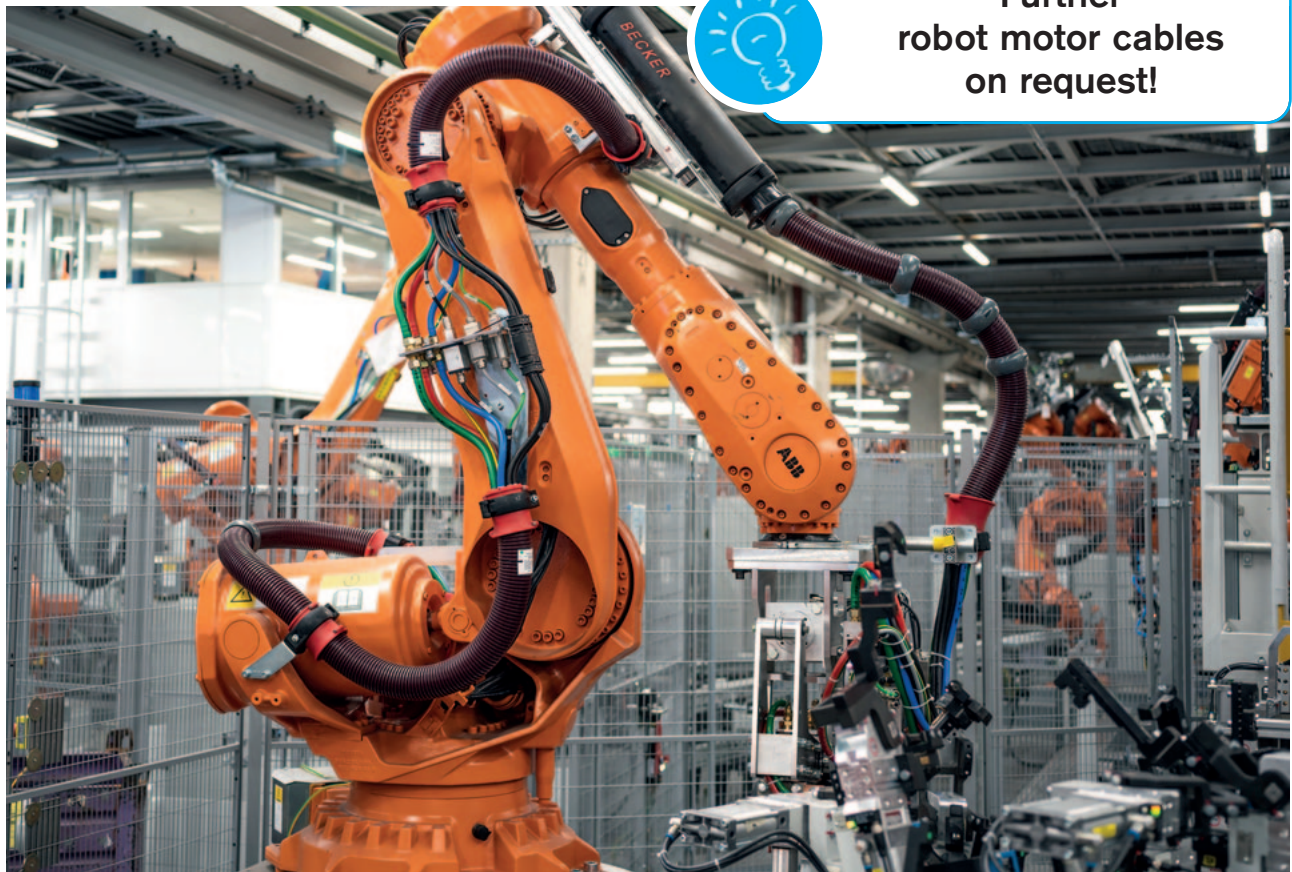

Further robot motor cables on request!

Foto: Becker GmbH, Dülmen