


RESISTANCE THERMOMETERS

RTD 605

Mineral insulated resistance thermometer with connection head and thread

RTD:	Pt 100 acc. to DIN EN 60751
sheath material:	mat. no. 1.4541
measuring range:	-50 up to +400°C and -50 up to +600°C

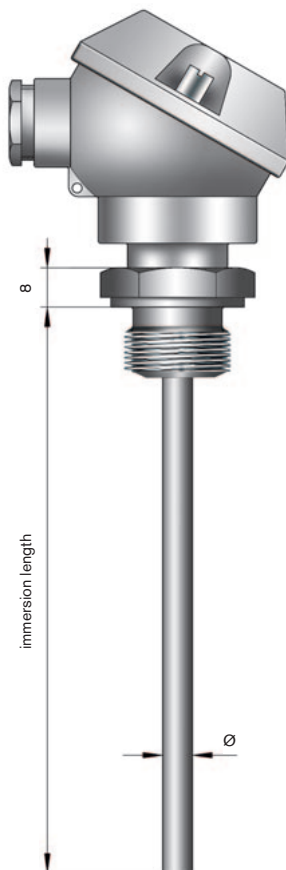

RTD:

- 1 x Pt 100 class B
- 1 x Pt 100 class A
- 2 x Pt 100 class B
- 2 x Pt 100 class A

CIRCUIT OF INNER WIRES:

- 2-wire circuit
- 3-wire circuit
- 4-wire circuit

SHEATH - Ø:

- 3,0 mm
- 4,5 mm
- 6,0 mm
- other sheath-Ø _____

CONNECTION HEAD:

- form MA / G 1/2 A
- form MA / G 3/8 A
- form MA / G 1/4 A
- form B / G 1/2 A
- form B / G 3/8 A
- form B / G 1/4 A
- form DAN-S / G 1/2 A
- other connection heads _____

ACCESSORIES (FIX):

- without
- with accessories _____

MEASURING RANGE:

- 50 up to +400°C
- 50 up to +600°C
- other measuring range _____

IMMERSION LENGTH: _____ mm