


# PROBE WITH STAINLESS STEEL SLEEVE

## THERMO PROBE WITH CONNECTION CABLE T221-228

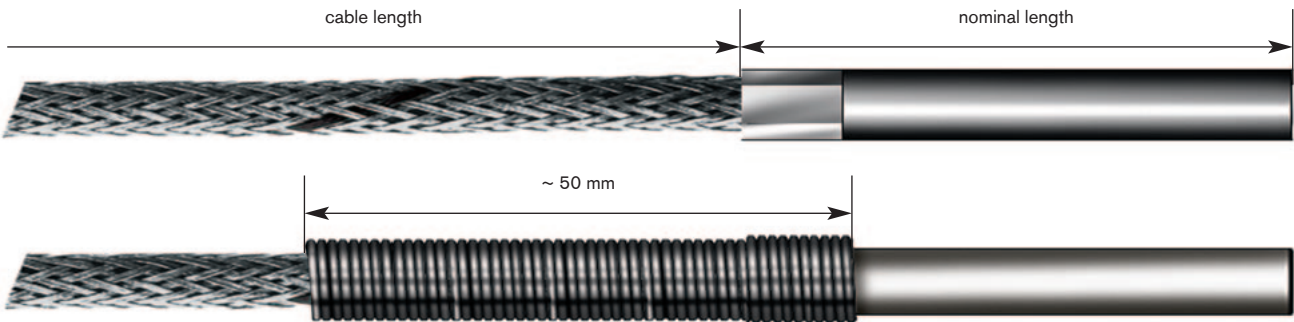

connection cable	construction	temperature
<input type="checkbox"/> TH 22 LRV 0,22 mm <sup>2</sup>	strand/fiber glass/fiber glass/stainless steel wire armouring	+400°C
<input type="checkbox"/> TH 22 LTV 0,22 mm <sup>2</sup>	strand/PFA/fiber glass/stainless steel wire armouring	+250°C
<input type="checkbox"/> TH DRR 0,50 mmØ	wire/fiber glass/fiber glass	+400°C
<input type="checkbox"/> TH 22 LTT 0,22 mm <sup>2</sup>	strand/PFA/PFA	+250°C

### Thermocouple:

- 1 x type L
- 2 x type L
- 1 x type J
- 2 x type J
- 1 x type K
- 2 x type K
- other thermocouples: \_\_\_\_\_

type J and K acc. to DIN EN 60584  
type L acc. to DIN 43710

### Connection cable:

- 1,0 m
- 1,5 m
- 2,0 m
- 2,5 m
- 3,0 m
- 4,0 m
- 5,0 m
- 10,0 m
- other cable length: \_\_\_\_\_

### Sleeve-Ø:

- 3,5 mm
- 4,0 mm
- 5,0 mm
- 6,0 mm
- 7,0 mm
- 8,0 mm
- other construction: \_\_\_\_\_

### Type of measuring tip:

- Form A, insulated measuring tip
- Form B, welded measuring tip

### Kink protection:

- with kink protection
- with fiber glass tube
- with heat shrinkable sleeve

### Type of cable ends:

- bare ends
- end sleeve
- cable lugs M4
- other cable ends: \_\_\_\_\_

Nominal length: \_\_\_\_\_ mm



- bent type also available!
- with plate 8 x 15 mm, hole Ø 5 mm
- smaller diameters on request!