


PROTECTING ARMATURES FOR GAUGE SLIDES

T401 Thermometer without additional protecting tube form MK

T402 Thermometer with 1 transmitter in the cap without additional protecting tube form MK

T401

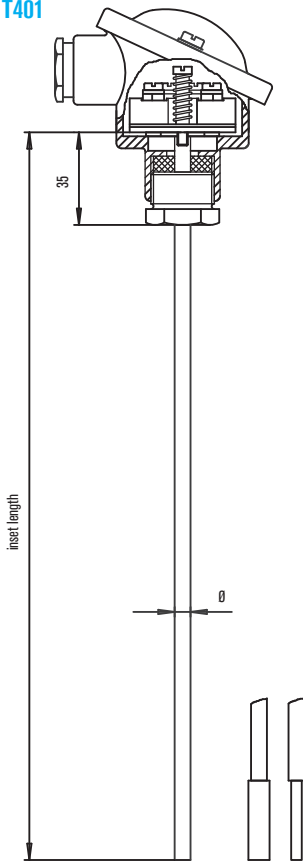

CONNECTION HEAD:

- B (KE 122)
- DAN-S (KE 066)
- DAN-Z (KE 064)
- BNK (KK 029)
- other connection head: _____

Ø SHEATH / MEASURING TIP:


- 3.0/3.0 mm
- 6.0/8.0 mm
- 4.5/4.5 mm
- 6.0/4.0 mm
- 6.0/6.0 mm
- 8.0/8.0 mm
- other Ø: _____

INSET LENGTH:

- 255 mm
- 340 mm
- 435 mm
- 655 mm
- 1275 mm
- 2025 mm
- 275 mm
- 375 mm
- 525 mm
- 735 mm
- 1425 mm
- 2425 mm
- 290 mm
- 405 mm
- 555 mm
- 825 mm
- 1625 mm
- 3025 mm
- 315 mm
- 430 mm
- 580 mm
- 1025 mm
- 1825 mm
- other length: _____

ADDITIONAL INFORMATION ABOUT THE THERMOCOUPLE OR RESISTANCE THERMOMETER PLEASE SPECIFY HERE:

T402

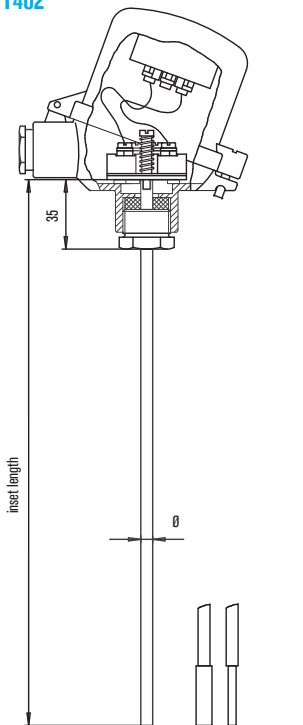

CONNECTION HEAD:

- DAN-WZ (KE 202)
- DAN-WS (KE 204)
- other connection head: _____

Ø SHEATH / MEASURING TIP:

- 3.0/3.0 mm
- 6.0/8.0 mm
- 4.5/4.5 mm
- 6.0/4.0 mm
- 6.0/6.0 mm
- 8.0/8.0 mm
- other Ø: _____

INSET LENGTH:

- 255 mm
- 340 mm
- 435 mm
- 655 mm
- 1275 mm
- 2025 mm
- 275 mm
- 375 mm
- 525 mm
- 735 mm
- 1425 mm
- 2425 mm
- 290 mm
- 405 mm
- 555 mm
- 825 mm
- 1625 mm
- 3025 mm
- 315 mm
- 430 mm
- 580 mm
- 1025 mm
- 1825 mm
- other length: _____

ADDITIONAL INFORMATION ABOUT THE THERMOCOUPLE OR RESISTANCE THERMOMETER PLEASE SPECIFY HERE:
