


PROTECTING ARMATURES FOR GAUGE SLIDES

T411 / T413

Immersion protecting armatures for gauge slides \varnothing 3 mm / \varnothing 8 mm

T413 / FOR GAUGE SLIDE \varnothing 3 mm

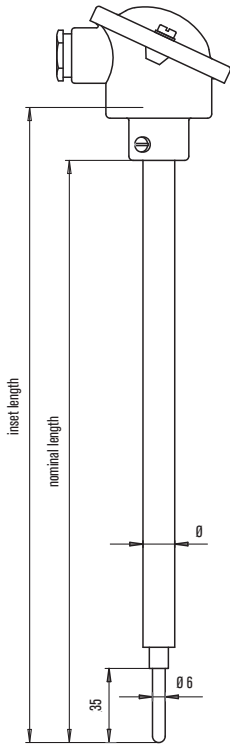

PROTECTING TUBE FORM AS TAPERED MEASURING TIP (QUICK RESPONSE TIME):

- 1.0305 \varnothing 15 x 2 mm
- 1.4762 \varnothing 15 x 2 mm
- 1.4571 \varnothing 15 x 2 mm
- 1.4841 \varnothing 15 x 2 mm

GAUGE SLIDE:

- without gauge slide
- with gauge slide: _____

FIXING:

- without
- with screw socket G3/4 A
- with flange
- with screw socket G1 A
- with screw socket G1/2 A
- with screwed plug G1/2 A

CONNECTION HEAD:


- B (KE 021)
- DAN-WZ (KE 201)
- DAN-Z (KE 063)
- DAN-WS (KE 203)
- DAN-S (KE 065)
- BNK (KK 028)
- other connection head: _____

NOMINAL LENGTH / INSET LENGTH:

- 500/ 525 mm
- 1400/1425 mm
- 250/275 mm
- 710/ 735 mm
- 2000/2025 mm
- 355/380 mm
- 1000/1025 mm
- 180/ 205 mm
- other length: _____

ADDITIONAL INFORMATION:

T411 / FOR GAUGE SLIDE \varnothing 8 mm

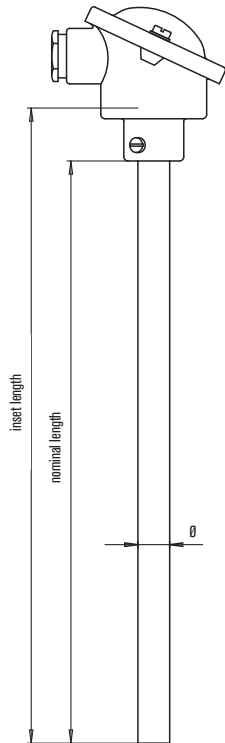

PROTECTING TUBE FORM A ACC. TO DIN 43763:

- 1.0305 \varnothing 15 x 3 mm
- 1.4762 \varnothing 15 x 2 mm
- 1.4571 \varnothing 15 x 2 mm, tip 15 x 3 mm
- 1.4841 \varnothing 15 x 2 mm

GAUGE SLIDE:

- without gauge slide
- with gauge slide: _____

FIXING:

- without
- with screw socket G3/4 A
- with stop flange
- with screw socket G1 A
- with screw socket G1/2 A
- with screwed plug G1/2 A

CONNECTION HEAD:

- B (KE 021)
- DAN-WZ (KE 201)
- DAN-Z (KE 063)
- DAN-WS (KE 203)
- DAN-S (KE 065)
- BNK (KK 028)
- other connection head: _____

NOMINAL LENGTH / INSET LENGTH:

- 500/ 525 mm
- 1400/1425 mm
- 250/275 mm
- 710/ 735 mm
- 2000/2025 mm
- 355/380 mm
- 1000/1025 mm
- 180/ 205 mm
- other length: _____

ADDITIONAL INFORMATION: