




# Halogen-free Cables

## SABIX® BL 445 C FRNC TP

SABIX® BL-Line Data - flexible paired data cable with overall copper screen



25 mm<sup>2</sup> - IEC 60332-3-22 - 350V

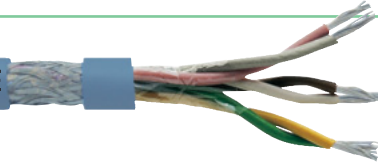

Marking for SABIX® BL 445 C FRNC TP 64450325:

SAB BRÖCKSKES · D-VIERSEN · SABIX® BL 445 C FRNC TP 3 x 2 x 0,25 mm<sup>2</sup> - IEC 60332-3-22 - 350V DNV CE and current meter marking

### Construction:

<b>Conductor:</b>	tinned copper strands with reference to VDE 0812 resp. IEC 60228, VDE 0295, class 5
<b>Insulation:</b>	special SABIX®
<b>Colour code:</b>	with reference to DIN 47100
<b>Stranding:</b>	pairwise, pairs in layers
<b>Wrapping:</b>	foil
<b>Screen:</b>	tinned copper braiding
<b>Sheath material:</b>	special SABIX® SHF 1 compound acc. to IEC 60092-360
<b>Sheath colour:</b>	pigeon blue (RAL 5014)

### Outstanding features:



- halogen-free
- asbestos-free
- good EMC characteristics
- good transmission rates and crosstalk attenuation
- no flame propagation
- flame retardant and self-extinguishing
- flexible
- for applications acc. to Hong Kong Convention ingredients tested acc. to the requirements of the Hong Kong Convention (2009) of the IMO
- approvals: DNV

### Technical Data:

<b>Peak operating voltage:</b>	max. 350 V
<b>Testing voltage:</b>	core/core 1500 V core/screen 1200 V
<b>Min. bending radius</b>	
fixed laying:	5 x d
flexible application:	10 x d
<b>Temperature range</b>	
fixed laying:	-40/+90 °C
flexible application:	-30/+90 °C
<b>Halogen-free:</b>	acc. to IEC 60754-1 + VDE 0482-754-1
<b>Fire performance:</b>	no flame propagation acc. to IEC 60332-3-22 + VDE 0482-332-3-22 cat. A. Flame retardant and self-extinguishing acc. to IEC 60332-1-2 + VDE 0482-332-1-2
<b>Corrosiveness of conflagration gases:</b>	in compliance with IEC 60754-2 + VDE 0482-754-2 - no development of corrosive conflagration gases
<b>Smoke density:</b>	acc. to IEC 61034 + VDE 0482-1034
<b>Flexibility:</b>	very good
<b>Absence of harmful substances:</b>	acc. to RoHS directive of the European Union, see chapter N „Technical data“

A  
51

### Possible on request:



- bare copper strands
- alternative colour code and sheath colour

item no.	no. of pairs x cross section n x mm <sup>2</sup>	outer-ø ± 5% mm	copper figure kg/km	cable weight ≈ kg/km
64450214	2 x 2 x 0,14	5,3	19,5	37
64450314	3 x 2 x 0,14	5,8	21,4	44
64450414	4 x 2 x 0,14	6,8	30,4	58
64450514	5 x 2 x 0,14	7,4	34,9	68
64450614	6 x 2 x 0,14	7,6	39,8	76
64450814	8 x 2 x 0,14	8,7	47,6	98
64451014	10 x 2 x 0,14	9,5	55,9	114
64451214	12 x 2 x 0,14	10,6	79,9	142
64451814	18 x 2 x 0,14	12,4	102,9	200
64450225	2 x 2 x 0,25	5,8	25,7	44
64450325	3 x 2 x 0,25	6,5	32,1	57
64450425	4 x 2 x 0,25	7,4	40,6	71
64450525	5 x 2 x 0,25	8,7	50,1	96
64450625	6 x 2 x 0,25	8,7	54,9	104
64450825	8 x 2 x 0,25	9,1	67,4	121
64451025	10 x 2 x 0,25	10,6	95,7	156
64451225	12 x 2 x 0,25	11,6	111,9	180
64451825	18 x 2 x 0,25	13,8	171,9	272
64452625	26 x 2 x 0,25	16,3	223,2	368
64450234	2 x 2 x 0,34	6,4	30,7	56
64450334	3 x 2 x 0,34	7,2	40,9	71
64450434	4 x 2 x 0,34	8,7	52,3	97
64450534	5 x 2 x 0,34	9,4	61,6	115
64450634	6 x 2 x 0,34	9,6	68,2	128
64450734	7 x 2 x 0,34	10,1	93,6	151

item no.	no. of pairs x cross section n x mm <sup>2</sup>	outer-ø ± 5% mm	copper figure kg/km	cable weight ≈ kg/km
64450834	8 x 2 x 0,34	10,8	100,0	164
64451034	10 x 2 x 0,34	11,8	119,7	194
64451234	12 x 2 x 0,34	13,4	138,2	238
64451834	18 x 2 x 0,34	15,8	215,3	357
64451934	19 x 2 x 0,34	15,8	223,2	367
64452734	27 x 2 x 0,34	18,2	289,0	478
64450250	2 x 2 x 0,50	7,2	40,5	70
64450350	3 x 2 x 0,50	7,9	52,5	88
64450450	4 x 2 x 0,50	9,5	67,4	120
64450550	5 x 2 x 0,50	10,5	95,6	154
64450650	6 x 2 x 0,50	10,8	105,4	171
64450850	8 x 2 x 0,50	11,9	131,3	207
64451050	10 x 2 x 0,50	13,4	155,9	259
64451250	12 x 2 x 0,50	15,0	212,6	322
64451850	18 x 2 x 0,50	17,4	283,5	451
64450275	2 x 2 x 0,75	7,9	52,5	87
64450375	3 x 2 x 0,75	9,2	69,5	115
64450475	4 x 2 x 0,75	10,7	105,3	156
64450575	5 x 2 x 0,75	11,6	126,3	186
64450675	6 x 2 x 0,75	12,4	141,0	221
64450875	8 x 2 x 0,75	13,8	200,7	284
64451075	10 x 2 x 0,75	15,2	241,6	338
64451275	12 x 2 x 0,75	17,2	283,2	411
64451875	18 x 2 x 0,75	19,4	384,0	553

Other dimensions and colours are possible on request.