


USB 3.0 cables

USB 3.0 M

USB 3.0 cable for the application in medical technology, flexible

transmission
length
up to 3 m

SAB MEDLine

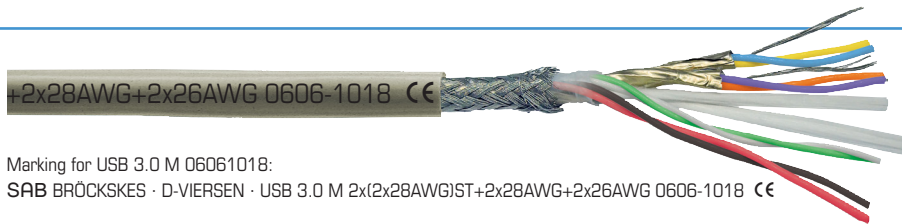

Marking for USB 3.0 M 06061018:

SAB BRÜCKSKES · D-VIERSEN · USB 3.0 M 2x(2x28AWG)ST+2x28AWG+2x26AWG 0606-1018 CE

Construction:

Conductor:	28 AWG: silver-plated strands, fine wires 26 AWG: tinned copper strands, fine wires
Insulation:	FEP
Colour code:	28 AWG: yellow, blue + orange, violet (USB 3.0), green, white (USB 2.0), 26 AWG: red, black (power supply)
Stranding:	USB 3.0 twisted and screened pairs, USB 2.0 twisted pairs, all elements together
Drain wire:	bare copper strands, fine wires
Screen:	alu foil
Stranding:	all USB 3.0 elements together
Wrapping:	foil
Screen:	tinned copper braiding
Sheath material:	SABmed S
Sheath colour:	grey (RAL 7000)

Technical data:

Peak operating voltage:	max. 50 V
Testing voltage:	core/core 600 V core/screen 600 V
Min. bending radius <i>fixed laying:</i> <i>flexible application:</i>	5 x d 10 x d
Temperature range <i>fixed laying:</i> <i>flexible application:</i>	-40/+180 °C -25/+180 °C
Impedance of data pairs:	nom. 90Ω
Absence of harmful substances:	acc. to RoHS directive of the European Union, see chapter N „Technical data“

Outstanding features:



- biocompatible sheath material
- biological harmlessness
acc. to EN ISO 10993-1,
cytotoxicity acc. to EN ISO 10993-5
- high temperature resistant
- high notch and tear resistance
- very good flexibility
- surface not adhesive

item no.	type	dimension	outer-ø approx. mm	copper figure kg/km	cable weight ≈ kg/km	ohmic resistance at 20°C max.Ω/km 28 AWG 26 AWG
06061018	USB 3.0 M	2 x (2 x 28 AWG)ST + 2 x 28 AWG + 2 x 26 AWG	5,6	25,4	48	223 140

Other dimensions and colours are possible on request.



For transmission lengths
more than 3 m,
please contact us!

Also possible
as harnessed cable
with USB type A and
USB type B plug!

